

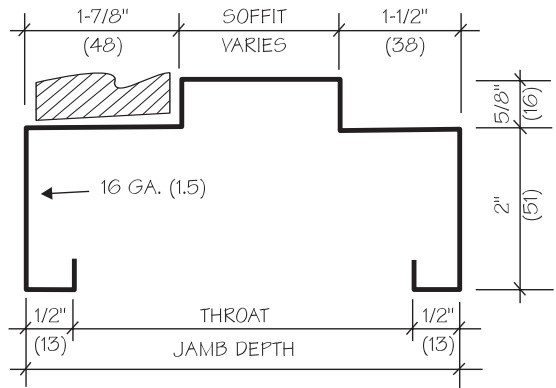



DW16 SERIES STANDARD & ENGINEERED FRAMES

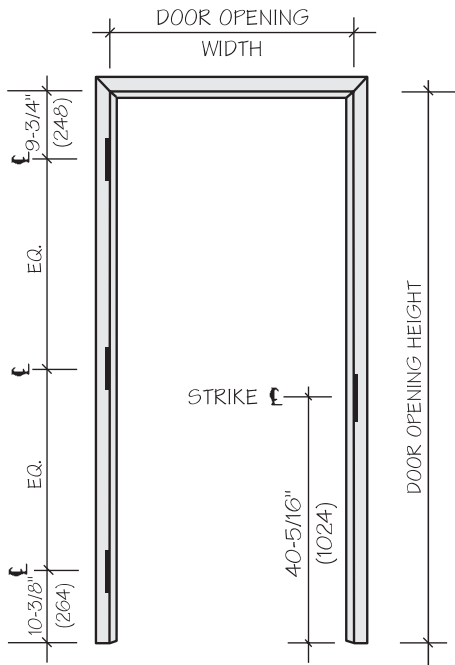

	MODEL	JAMB DEPTH	THROAT	SOFFIT
STD.	DW16-375	4-3/4" (121)	3-3/4" (95)	1-3/8" (35)
	DW16-462	5-5/8" (143)	4-5/8" (118)	2-1/4" (57)
	DW16-487	5-7/8" (149)	4-7/8" (124)	2-1/2" (64)
	DW16-612	7-1/8" (196)	6-1/8" (172)	3-3/4" (95)
ENG.	MINIMUM	4-1/2" (114)	3-1/2" (89)	1-1/8" (28)
	MAXIMUM	12-1/4" (311)	11-1/4" (286)	8-7/8" (225)

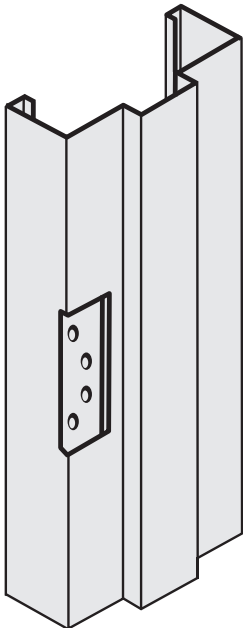


4-1/2" (114) HINGE PREPARATION— 8 GA. (4.3) REINF. WITH DUST BOX

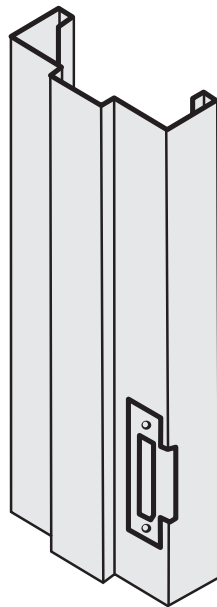

4-7/8" (124) STRIKE PREPARATION [ANSI A115.1] 14 GA. (2.0) REINF. WITH DUST BOX.

OPTIONAL DEADBOLT PREPARATION AVAILABLE

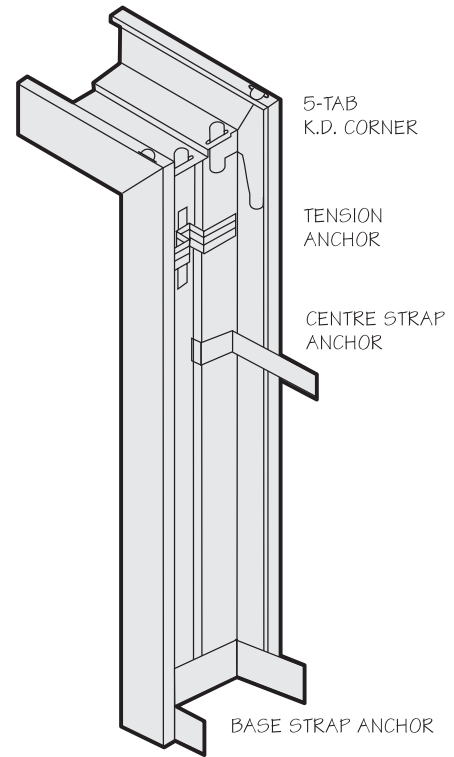

PRINTED IN CANADA

PROJECT:

DATE:

SH: OF

LH

SWING KEY

RH